


Flange Weld Testers




Integrated Solutions
to Piping Problems

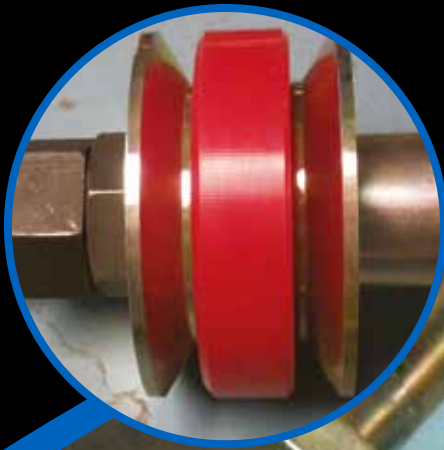

Purge, Weld & Test Flange Connections with the same tool.

- Fast & Easy Installation & Testing
- Faster Pipe Repairs & Retrofits
- Reduces NDE
- Minimal Water Use, less Handling & Waste
- Minimum 1.5 : 1 Safety Factor
- Centre Port for Upstream Monitoring

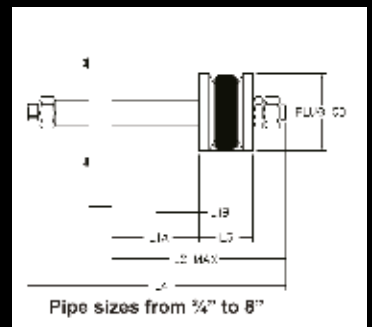

Flange Size	Pipe Sched	Seal to Pipe Clearance (ins (mm))	Vent & Fill Port NPT size	L1-A (ins (mm))	L1-B (ins (mm))	L2 (ins (mm))	L3 (ins (mm))	L4 (ins (mm))	Shipping Weight in Kg 150 # Rating	Shipping Weight in Kg 300 # Rating
3/4" DN20	80 40	0.07 (1.8) 0.07 (1.8)	1/8" F	12 (304.8)	3 (76.2)	14 1/4 (362.0)	1 1/4 (31.8)	24 11/16 (627.1)	3.62	4.08
1" DN25	80 40	0.11 (2.8) 0.11 (2.8)	1/8" F	12 (304.8)	3 (76.2)	14 1/4 (362.0)	1 1/4 (31.8)	24 11/16 (627.1)	4.08	4.98
1 1/2" DN32	80 40	0.13 (3.3) 0.13 (3.3)	1/8" F	12 (304.8)	3 1/8 (79.4)	15 (381.2)	1 5/8 (41.3)	20 3/8 (517.5)	4.53	5.89
1 1/2" DN40	80 40	0.17 (4.3) 0.17 (4.3)	1/4" F	12 (304.8)	3 1/8 (79.4)	15 1/8 (384.2)	1 3/4 (44.5)	20 3/8 (517.5)	4.98	6.80
2" DN50	80 40	0.25 (6.4) 0.25 (6.4)	1/4" F	12 (304.8)	3 1/8 (79.4)	15 1/8 (384.2)	1 3/4 (44.5)	20 3/8 (517.5)	6.34	8.16
2 1/2" DN65	80 40	0.25 (6.4) 0.25 (6.4)	1/4" F	12 (304.8)	6 (152.4)	17 1/8 (435.0)	2 (50.8)	22 3/8 (568.3)	9.06	11.33
3" DN80	80 40	0.38 (9.7) 0.38 (9.7)	3/4" F	12 (304.8)	6 (152.4)	17 1/8 (435.0)	2 (50.8)	22 3/8 (568.3)	11.78	14.95
4" DN100	80 40	0.44 (11.2) 0.44 (11.2)	3/4" F	12 (304.8)	6 (152.4)	17 1/8 (435.0)	2 (50.8)	22 3/8 (568.3)	14.50	19.48
6" DN150	80 40	0.50 (12.7) 0.50 (12.7)	3/4" F	12 (304.8)	6 (152.4)	20 1/2 (520.7)	3 3/4 (95.3)	28 (711.2)	31.72	41.23
8" DN200	80 40	0.50 (12.7) 0.50 (12.7)	3/4" F	12 (304.8)	6 (152.4)	20 3/4 (527.1)	4 (101.6)	28 (711.2)	66.15	80.65